

# JSD-80 “Last Saved” Power On Format Fix

Created 1/10/07


This procedure is to correct a problem of the JSD-80 waking up in “Mic” mode no matter which format was selected when the processor was shut down. This may occur when “Last Selected” Power On format is used.

## Possible causes of this problem are:


- A loose power plug at the unit or at the power source that the unit is plugged into.
- A brownout or interruption of the power supply during wake up.
- The unit being shut off during wake up and then restarted.

## Fix:


1. Ensure the unit is plugged in and has solid connections to the power source.
2. Connect to the Graphical User Interface (GUI) on the JSD-80 Cinema Processor software.
3. Select the “Connect” icon.

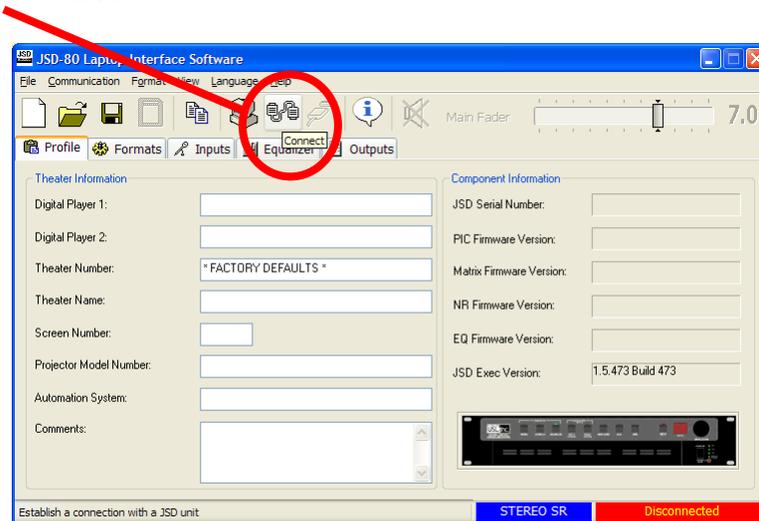


4. Select the Formats tab.

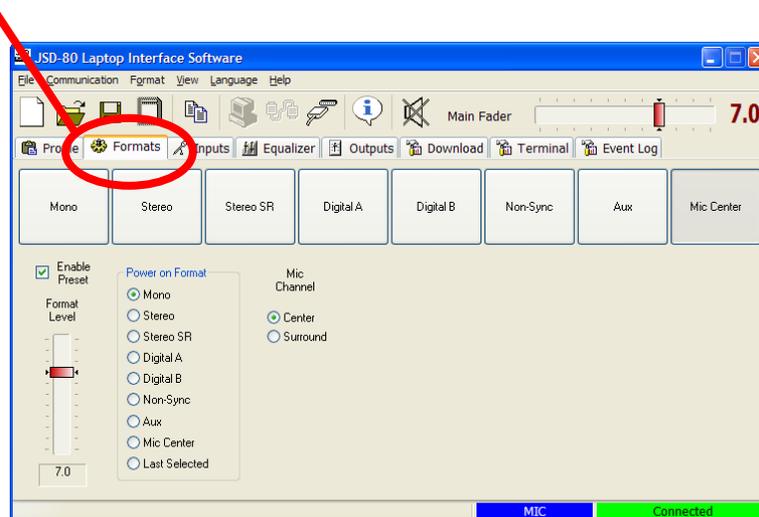

5. Click on the “Last Selected” option.

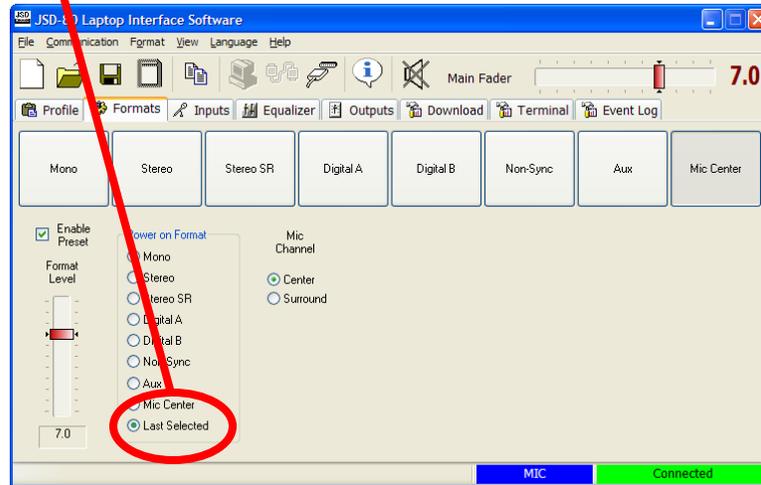

6. Select the “Disconnect” icon.

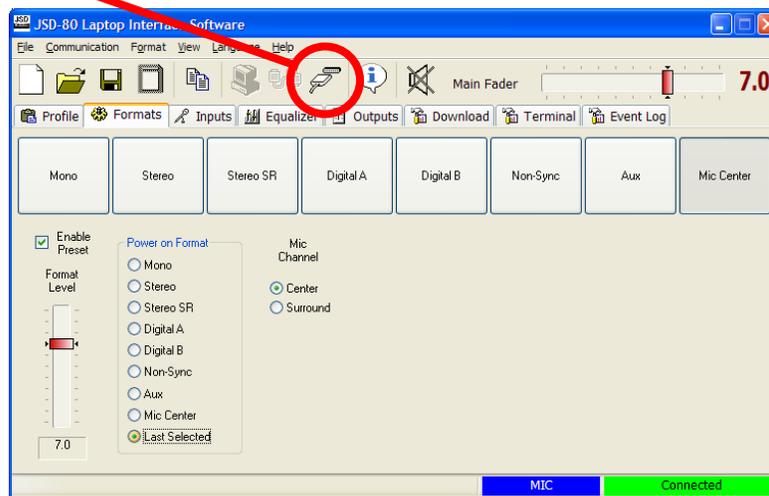

7. Uncheck the “Save to Personality Module” box and click Yes.

