#### 47 CFR Ch. I (10-1-14 Edition)

### § 73.333

baseband range of 50 Hz to 15 kHz shall not exceed 45% and modulation of the carrier by the sum of the amplitude modulated subcarrier in the baseband range of 23 kHz to 53 kHz shall not exceed 45%.

(ii) When a signal exists in only one channel of a stereophonic sound transmission having more than one stereophonic subcarrier in the baseband, the modulation of the carrier by audio components within the audio baseband range of 23 kHz to 99 kHz shall not exceed 53% with total modulation not to exceed 90%.

(b) Stations not transmitting stereo with the method described in (a), must limit the main carrier deviation caused by any modulating signals occupying the band 19 kHz  $\pm 20$  Hz to 125 Hz.

(c) All stations, regardless of the stereophonic transmission system used, must not exceed the maximum modulation limits specified in §73.1570(b)(2). Stations not using the method described in (a), must limit the modulation of the carrier by audio components within the audio baseband range of 23 kHz to 99 kHz to not exceed 53%.


[51 FR 17029, May 8, 1986]

### §73.333 Engineering charts.

This section consists of the following Figures 1, 1a, 2, and slider 4 and 5.

NOTE: The figures reproduced herein, due to their small scale, are not to be used in connection with material submitted to the F.C.C.

**C**16

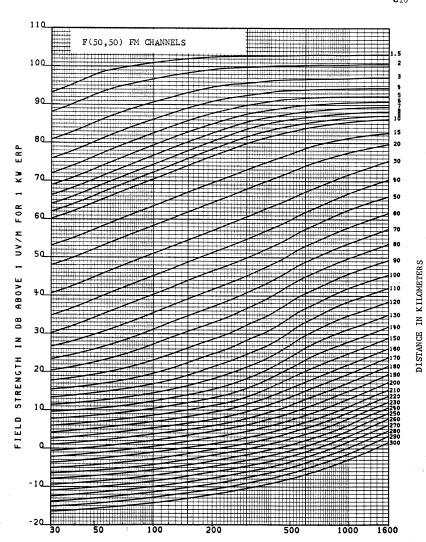


Transmitting Antenna Height in Meters

FCC \$73.333 FIGURE 1

## FM CHANNELS

ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT
OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 50 PERCENT
OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS


E F IN db ABOVE 1 pv/m E IN µv/m µv/m 8 POWER IN db ABOVE 1km | 100m | 11m | 11m | 11m | 11m | 100m Sliding Scale for use with Figure 1, § 73.333 −\$-20 **2**0 10 0 -10

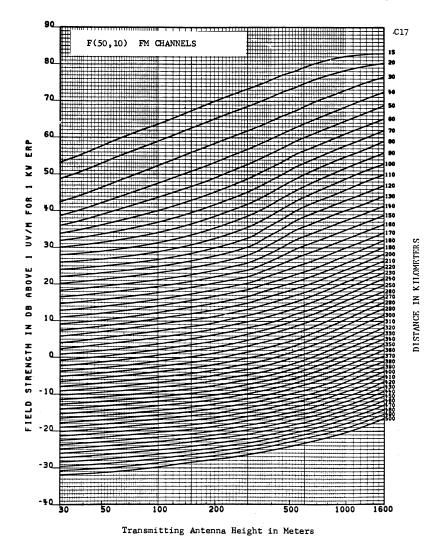



FCC 873.333 FIGURE la

FM CHANNELS
ESTIMATED FIELD STRENGTH EXCEEDED AT 50 PERCENT
OF THE POTENTIAL RECEIVER LOCATIONS FOR AT LEAST 10 PERCENT
OF THE TIME AT A RECEIVING ANTENNA HEIGHT OF 9 METERS



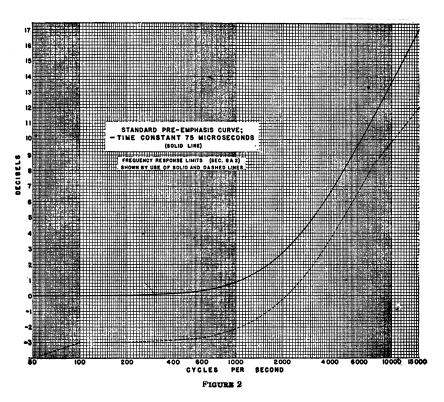

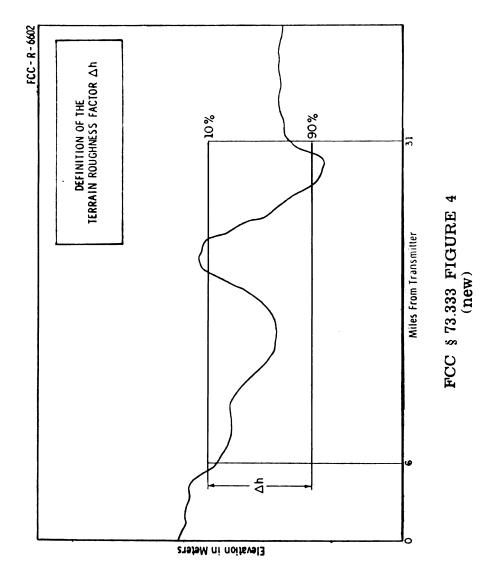

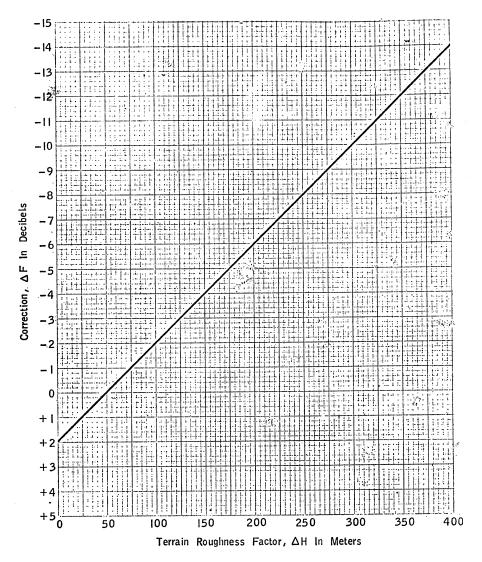

TERRAIN ROUGHNESS CORRECTION

for use with estimated FM F(50,50) and F(50,10° field strength curves

# FCC \$73.333 FIGURE 5

 $(Secs.\ 4,\ 5,\ 303,\ 48\ Stat.,\ as\ amended,\ 1066,\ 1068,\ 1082\ (47\ U.S.C.\ 154,\ 155,\ 303))$ 

 $[28~\mathrm{FR}$ 13623, Dec. 14, 1963, as amended at 35 FR 2591, Feb. 5, 1970; 40 FR 27679, July 1, 1975; 45 FR 28141, Apr. 28, 1980; 48 FR 29508, June 27, 1983; 49 FR 19670, May 9, 1984]

EFFECTIVE DATE NOTE: At 42 FR 25736, May 19, 1977, in  $\S73.333$ , the effective date of Figures 4 and 5 was stayed indefinitely.